






















Supports and accessories

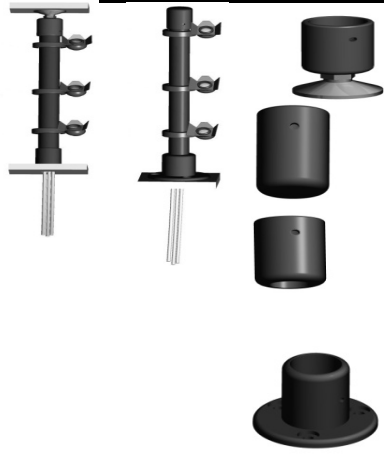
	Through panel threaded tube mount	65-101
	Surface mount	65-103
	Staple mount for Ø.4" tube and Ø.24" rod	65-102
	Magnetic mounting plate	65-310
	Ø.24" rod, 1" long	65-110-25
	Ø.24" rod, 1" long	65-110-50
	Ø.24" rod, 1" long	65-110-100
	Ø.24" rod, 1" long	65-110-200
	Ø.24" rod, 1" long	65-110-300
	Spacer Ø.24" - male/ female, M3, .4" long	65-140
	Spacer Ø.24" - male/ female, M3, .8" long	65-141
	Spacer Ø.24" - male/ female, M3, 2" long	65-142
	Spacer Ø.24" - male/male, M3, .2" long	65-130
	Spacer Ø.24" - female/female, M3, .4" long	65-120
	Ø.5,5" micro coupling ball 6 x M3 threaded holes	65-250
	Adjustable coupler for Ø3,4,5 optic cable to Ø.24" rod	65-100
	Sliding flat head screw for accessories fixation on open side tubes 24-102 and 24-105	67-200
	Micro ball-joint with M3 male pin and M3 threaded hole	65-200



	Micro ball-joint with male pin and sliding flat head screw for fixation on open side tubes 24-102 and 24-105	65-205
---	--	--------



Ø.4" fixation 10mm

	Socket base for Ø.4" tube	25-101
	Surface mounting plate for Ø.4" tube parallel to support plane	25-110
	Ø.4" tube, in black anodized aluminium, 20" long	25-102-500
	Ø.4" tube, in black anodized aluminium, 40" long	25-102-1000
	Tubes coupler, Ø.4" to Ø.4"	65-109
	Tubes coupler, Ø.4" to Ø.63 tube or TFO lightstick	65-104
	Tubes coupler, Ø.4" to Ø.8" tube or TFO lightstick	65-105





Ø.63" and Ø.8" fixation 16mm and 20mm

	End cap with screw-jack for Ø.63"(16mm) tube or TFO lightstick	24-101
	Blind cap for Ø.63"(16mm) tube or TFO lightstick	24-104
	Open cap for Ø.63"(16mm) tube or TFO lightstick	24-103
	Socket base for Ø.8" open side tube or Ø.63" tube (for Ø.63" tube, use 24-103 or 24-104 adaptors)	22-104

	Open side tube Ø.63", black lacquered, 20" long	24-102-500
	Open side tube Ø.63", black lacquered, 40" long	24-102-1000
	Open side tube Ø.8", black lacquered, 20" long	24-105-500

	Open side tube Ø,8" , black lacquered, 40" long	24-105-1000
	Black PVC profile, side opening shutter, per 1 meter	24-110

CAX 3,4,5 fiber optic support

	Through panel fixation for CAX3,4,5 end	40-101
	Adjustable support for CAX3,4,5 fiber optic or 55-402 micro-head, staple mount for Ø,4"	65-106
	Adjustable support for CAX3,4,5 fiber optic or 55-402 micro-head, staple mount for Ø,63"	65-107
	Adjustable support for CAX3,4,5 fiber optic or 55-402 micro-head, staple mount for Ø,8"	65-108