

## Maintenance :

### **WARNING:**

**Disconnect the electrical supply and allow lamp cooling prior to service.**

### Relamping

**Maximum lamp wattage 50W : exceeding lamp maximum can cause non reversible damage to fiber optic material.**

#### Replacement lamp

Exact model specified on generator label.

19-131 12V 50W General Electric

19-132 12V 50W Fiberoptik BLV



### Infra-red filter replacement / color filter, converter addition.



19-230 dichroic blue filter

19-232 dichroic yellow filter

19-220 conversion filter (3000 K ->2000 K)

19-231 dichroic red filter

19-233 dichroic green filter

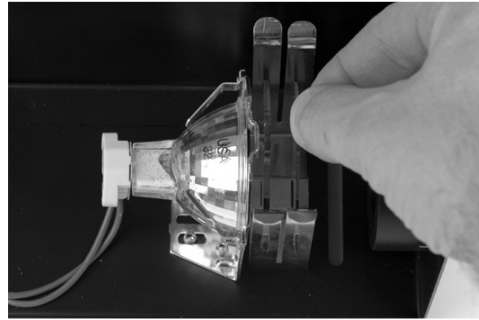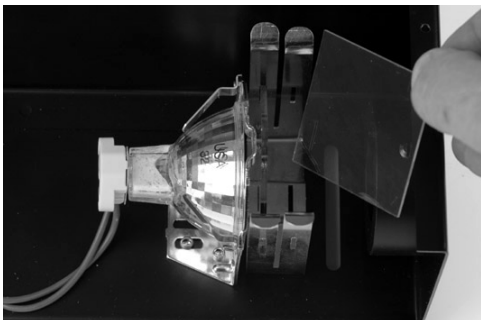

# INSTALLATION GUIDE

## Mini generator 50W

10-311-G


10-312-G

10-321-G

10-311-B

10-312-B

10-321-B

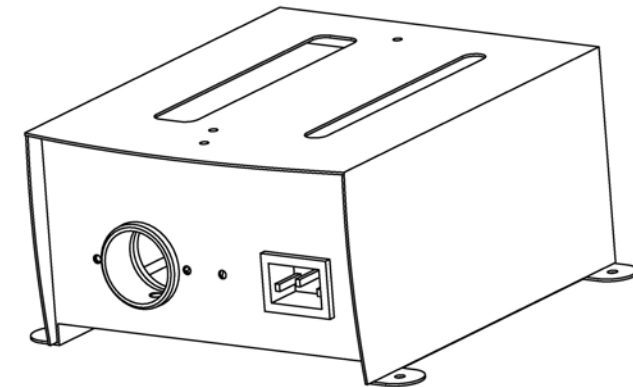

**Please read this guide prior to installation to insure proper usage.**

For indoor and dry locations only.

Install this product according to NEC rules.

For further information please contact :

Luxam Inc  
[www.luxam.com](http://www.luxam.com)  
[info@luxam.com](mailto:info@luxam.com).